

"SLASHBUSTER"[®]

XL 480

Excavator Mounted Brush Cutting Attachment

Standard Front Excavators
Long Front Excavators
Walking Excavators

"SLASHBUSTER"[®]
State-of-the-Art
Land Management
and
Right-of-Way
Equipment

*It's Not How Fast You Cut,
It's How Well You Cut Fast*

Applications of the D&M "SLASHBUSTER"[®] Equipment

1. Building roads over swampy ground
2. Clearing and grubbing contracts
3. Clearing building sites
4. Eliminates slash disposal burning in populated areas
5. Cuts costs of trucking debris from cleared areas.
All cuttings are mulched into soil.
6. Builds new and maintains established right-of-ways.
7. Retards tall growing trees eliminating blanket spray programs
8. Daylighting roads cutting the expense of sanding
9. Sight obstructions removed from corners and intersections.
10. Better maintenance of drainage ditches.
11. Brush clearing around bridges gives greater exposure to sunlight with easier and more economical maintenance, especially with older structures.



"SLASHBUSTER"®

XL 480

Excavator Mounted Brush Cutting Attachment

XL 480

General Specifications

- 48" cutting swath
- Cuts and mulches trees to 10' diameter
- Recommended for standard or long front excavators
- Adaptable to 20,000 to 40,000-lb standard front excavators or up to 100,000-lb long front excavators
- Recommended for walking excavators
- Standard automatic wire shear
- Standard rotating hub debris guard
- Standard "SLASHBUSTER" cutting disk with S-7 cast and hardened teeth
- 1,300-lb. to 2,300-lb. total weight*

Options:

- Blade bar cutter
- Integral hydraulic thumb
- Integration with standard excavator bucket thumb
- Integration with bucket quick disconnects
- Ninety-degree tilt mount
- "VCP" Remote spot herbicide applicator

Basic Installation Requirements

Hydraulic:


- Continuous service priority flow circuit
- 30 GPM to 44 GPM*
- 2,500 PSI minimum recommended
- Three position directional control valve recommended
- Dual acting cylinder circuit with 15 GPM, 2500 PSI for thumb

Electric:

- 20 AMP auxiliary circuit recommended
- Cab mounted control for forward, neutral and reverse with indicator light recommended

Note: It is recommended that the excavator is provided with a hinged front screen guard for the front of the cab that meets or exceeds SAE J1084 specs.

*Varies with excavator size and options

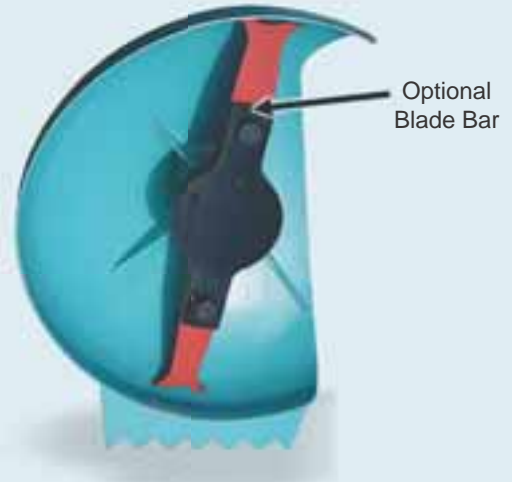

"SLASHBUSTER"®

EQUIPMENT

Unmatched in Performance,
Reliability and Output

D&M "SLASHBUSTER" Equipment is the Most Advanced
State-of-the-Art Brushcutting and Clearing Equipment Known.



D&M Machine Division, Inc.

12 Monte-Brady Road Montesano, WA 98563

(360) 249-3366

email: info@slashbuster.com

www.slashbuster.com

Exclusive Manufacturer of "SLASHBUSTER" Equipment

THIS EQUIPMENT IS PROTECTED BY ONE OR MORE OF THE FOLLOWING PATENTS: 4,769,977; 5,103,882; 5,201,350; 5,329,752; 5,408,814; S/N 08/720,536; AUSTRALIAN PATENTS: 600716; 618679; 652131; 654411; 665724; CANADIAN PATENTS: 1,281,908; 2,084,971; NEW ZEALAND PATENTS: 245249; 270419; EUROPEAN PATENT 0298977, REGISTERED IN GB, FR, IT, CH, NL, BE (298977E), DE (37793098), AT (0076250E), SE (879019487); AND PATENTS PENDING IN THE UNITED STATES, AUSTRALIA, CANADA, EUROPE, FINLAND AND NEW ZEALAND.